

ADHESIVE ACCESSORIES

SIMPSON

Strong-Tie
ANCHOR SYSTEMS

Adhesive Accessories

Epoxy-Tie® Adhesive Dispensing Tools

Each tool has been designed to work with Epoxy-Tie® cartridges for trouble-free dispensing. These tools are for use with SET, SET-XP™, EDOT™, ET, ETI adhesives and CIP and CIP-F paste-over material.

CDT-10

Premium Manual Dispensing Tool for SET-PAC EZ™ Adhesive, AT10 Adhesive and other Single Cartridge Adhesives –

The CDT10 features a high thrust drive mechanism and a molded fiber reinforced nylon body for ultimate strength and light weight. The handle is positioned under the cartridge for balance and ease of use. The drive mechanism is released by pushing forward on the drive handle. Cartridges “snap-lock” into position.



CDT10

EDT22B

Manual Dispensing Tool for 22 oz. Cartridges –

The EDT22B features a molded fiber reinforced nylon body for ultimate strength and light weight. The handle is positioned under the cartridge for balance and ease of use. The drive mechanism is released by pushing forward on the drive handle. Cartridges “snap-lock” into position.



EDT22B

EDT22CKT

Battery-Powered Dispensing Tool for 22 oz. Cartridges –

The EDT22CKT offers power dispensing without the need for a hose or compressor. The tool features dosage and rate control for maximum efficiency. Each battery charge dispenses approximately 25 cartridges and recharging takes 1 hour. Tool comes complete with two 14.4V batteries and a charger.



EDT22CKT
Tool

EDT22CKT
Charger

EDT22AP

Pneumatic Dispensing Tool for 22 oz. Cartridges –

The EDT22AP has an ergonomically designed nylon handle that includes a flow rate adjustment. This lightweight tool (6 lbs.) also features a power piston return.


EDT56AP

Pneumatic Dispensing Tool for 56 oz. Cartridges –

The EDT56AP has an ergonomically designed nylon handle that includes a flow rate adjustment. This lightweight tool (9 lbs.) also features a power piston return.



EDT22AP

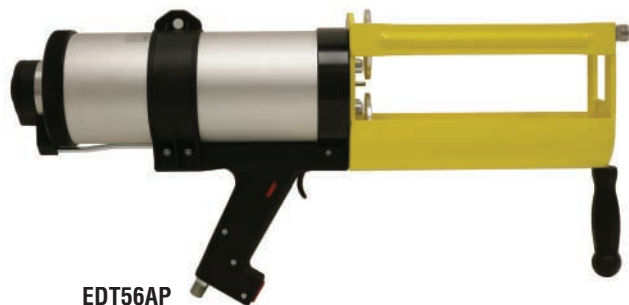

EDT56AP

Description	Model No.	Ctn Qty
Premium Tool for single tube cartridges	CDT10	1
Manual Tool for 22 oz. cartridges	EDT22B	1
Battery Powered Tool for 22 oz. cartridges	EDT22CKT	1
Pneumatic Tool for 22 oz. cartridges ^{1,2}	EDT22AP	1
Pneumatic Tool for 56 oz. cartridges ^{1,2}	EDT56AP	1

1. Air supply attachment is 1/4-18 NPT (male) thread.
2. Recommended operating air pressure is between 80–100 psi (116 psi max.).

Maintenance tips, troubleshooting and repair parts schematics available at www.simpsonanchors.com.

ADHESIVE ACCESSORIES

Adhesive Accessories

Acrylic-Tie® Adhesive Dispensing Tools

ADT813B

Manual Dispensing Tool for 8 oz. and 13 oz. Cartridges –
 The ADT813B features a molded fiber-reinforced nylon body for ultimate strength and light weight. The handle is positioned under the cartridge for balance and ease of use. The drive mechanism is released by pushing forward on the drive handle. Cartridges “snap-lock” into position.



ADT813B

ADT30

Manual Dispensing Tool for 30 oz. Cartridges –
 The ADT30 features a steel carriage and a molded fiber-reinforced nylon body for ultimate strength and light weight. The handle is positioned under the cartridge for balance and ease of use. The drive mechanism is released by pushing forward on the drive handle.



ADT30

ADT30CKT

Battery Powered Dispensing Tool for 30 oz. Cartridges –
 The ADT30CKT offers power dispensing without the need for a hose or compressor. The tool features dosage and rate control for maximum efficiency. Each battery charge dispenses approximately 25 cartridges and recharging takes 1 hour. Tool comes complete with two 14.4V batteries and a charger.



ADT30CKT Tool

ADT30CKT Charger

ADT30P

Pneumatic Dispensing Tool for 30 oz. Cartridges –
 The ADT30P has an ergonomically designed nylon handle complete with flow rate adjustment. This lightweight tool (6 lbs.) also features a power piston return.



ADT30P

Description	Model No.	Ctn Qty
Manual Tool for 8 oz. and 13 oz. cartridges	ADT813B	1
Manual Tool for 30 oz. cartridges	ADT30	1
Battery Powered Tool for 30 oz. cartridges	ADT30CKT	1
Pneumatic Tool for 30 oz. cartridges ^{1,2}	ADT30P	1

1. Air supply attachment is 1/4-18 NPT (male) thread.
 2. Recommended operating air pressure is between 80–100 psi (116 psi max.).

Maintenance tips, troubleshooting and repair parts schematics available at www.simpsonanchors.com.